

USM Go

Setting new standards in inspection instrumentation




The USM Go is the lightest and most portable ultrasonic flaw detector available from GE Sensing & Inspection Technologies. The USM Go is designed for ease of prolonged operation in the harshest inspection environments in the oil and gas, aerospace, power generation and automotive industries.



GE imagination at work

USM Go - Integrating years of GE experience and expertise in ultrasonics in a portable flaw detector.

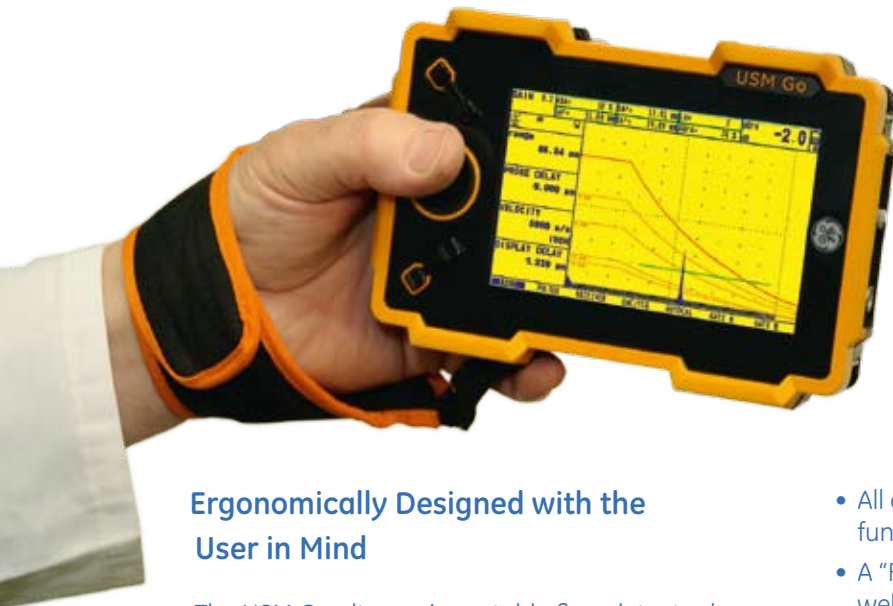

Ergonomically Designed with the User in Mind

The USM Go ultrasonic portable flaw detector has been ergonomically designed to provide an instrument which is light, small and easy to use in the harshest of inspection environments. Its ergonomic features include;

Portability

- Small size and weight, which allow the instrument to be easily operated in confined spaces and areas of difficult access.
- Light enough to be carried throughout a whole day's shift
- Battery provides up to 5,5 hours operation. Can be recharged on- or off-board.

Easy-to-Read Screen

- A display screen which is the same size as those in other GE flaw detectors, even though the instrument is much smaller than other instruments in the range.
- An 800x480 pixel display, which is better resolution than a standard DVD.
- A screen with an optimized aspect ratio to ensure highly defined echo separation.
- A screen which can be easily viewed, whether hand-held or desk-mounted.
- A screen which has been ergonomically sized to help reduce eyestrain.

Ease of Use

- Can be operated with one hand, leaving other hand free for other tasks, such as maintaining probe in optimum position or holding onto ladders.
- Features incorporated pressure-sensitive, navigation joystick control derived from the range of remote visual inspection equipment offered by GE.

- All controls within fingertip reach. User can dedicate four function keys according to preference.
- A "Flip" function allows the instrument to be used equally well by left-handed and right-handed people.
- A detachable stand allows the user to optimize the viewing angle, when the instrument is desk- or bench-mounted. The attachment point is suitable for a standard tripod thread.

Increasing Productivity

The USM Go features intuitive operation so there is virtually no time-consuming, learning curve. You are productive from the moment you pick it up! Navigation is simplified using the proven graphical user interface (GUI) and the innovative joystick, allowing one-handed operation and fast and accurate adjustment.

Other features allowing increased productivity are:

- A robust moulded rubber casing to withstand the harshest environments and significantly reduce downtime. The instrument is dust- and water-proof to IP67 and is tested to withstand shock and vibration.
- A standard USB connection to allow data to be downloaded from the flaw detector for further analysis or storage. The instrument is standard delivered with a 2 GB SD memory card (multiple cards can be used).
- Reports are produced in jpeg or bmp format so there is no need for special reading software.
- A simple on-board data logger to collect and save thickness measurements.
- State-of-the-art electronics, including digital amplifier, square wave pulser (optional) and digital filters for a wide range of application benefits.





- A wide Pulse Repetition Frequency range. This allows the USM Go to be used at low PRF to inspect forged parts for inclusions and porosity without any “ghost” echoes and just as easily find application in weld inspection at high PRF when fast and regular scanning movement is required to optimize inspection times.

Versatile and Upgradeable

Customized versions of the USM Go are also available, specially adapted to meet specific inspection codes or applications. For example, an optional square wave pulser can be supplied for applications involving the inspection of highly attenuative material, such as castings and forgings. The versions shown in the table are currently available. For more detailed information, please contact your local GE representative or visit www.gesensinginspection.com

	USM Go Base	USM Go AWS	USM Go DAC AWS	USM Go Advanced
The instrument	•	•	•	•
1 Battery	•	•	•	•
Battery charger	•	•	•	•
Power Cable	•	•	•	•
Transportation case	•	•	•	•
Brief Instruction Card	•	•	•	•
Operating Manual on CD	•	•	•	•
Manufacturer Certificate	•	•	•	•
Hand strap	•	•	•	•
AWS option		•	•	•
DAC / TCG Option			•	•
DGS Option				•
Phantom PRF Option				•
Square Wave Pulser Option				•

A Wide Range of Applications

The USM Go has been designed to provide flaw detection capability in inspection situations throughout the industrial and process spectrum, from aerospace to power generation and from the automotive sector to the oil and gas industry.

These include:

Weld Inspection

Inspection of Forgings and Castings

Inspection of Rails

Inspection of Composites



Technical Specifications - USM Go

LCD Display	
Active Area	W: 108 mm (4.25") x H: 64.8 mm (2.55")
Size	5.0"
Pixel Resolution	800 (W) x 480 (H) dot

Connectors	
Probe Connectors	Two LEMO-00
UT Output Connector	SAP output, Alarm
USB Interface	micro USB connector
SD-Card Connector	Full size SD card slot to accommodate standard SD cards

Pulser -	
All pulser measurements taken according to EN12668 specifications	
Pulser Mode	Simulated spike standard, Uni-polar square wave optional
Pulser Voltage (SQ Mode)	120 V to 300 V with 10 V step in a tolerance of 10%
Pulser Width (SQ Mode)	30 ns to 500 ns with 10 ns step in a tolerance of 10%
Pulser Amplitude (Spike Mode)	Low: 120 V, High: 300 V
Damping	50 or 1000 Ohms
PRF	Automatically optimized between 15 Hz to 2000 Hz, 3 automatic adjustment modes: AutoLow, Auto Med, AutoHigh - Optional manual control of PRF from 15 to 2000 Hz.

Receiver	
Range	14016 mm at steel longitudinal wave (557")
Digital Gain	Dynamic range of 110 dB, with 0.2 dB step
Analog Bandwidth	0,9 - 17,4 MHz
Filters	Broad Band Low Pass 5 MHz (also 4) 10 MHz 13 MHz

Gate	
Independent Gates	2 gates (A and B), Gate B supports triggering by gate A
Rectification	Positive (POS) Full wave (FW) Negative (NEG) RF
Measurement	Peak JFlank

Memory	
Capacity	2 GB SD Card. Up to 16 GB memory cards can be used
Report	Jpeg and BMP reports

Environmental	
Battery	5.5 hours On board charging Off board charging with optional adaptor Proportional battery gauge indicating remaining operation time
Charger	"Universal" AC (100-240 V, 50-60 Hz) Meets CCC, CE, UL, CSA and PSE requirements
Size	175 mm x 111 mm x 50 mm
Weight	845 g (1.87 lb) with the battery
Languages	Russian, Portuguese, Italian, Polish, Czech, English, German, French, Spanish, Chinese and Japanese

Protection as per Mil-Std-810F	
Damp Heat & Humidity (Storage)	10 Cycles: 10 hrs at 60°C (140°F) down to 30°C (86°F), 10 hrs at 30°C (86°F) up to 60°C (140°F), transition within 2 hrs, 507.4
Temperature Shock (Storage)	3 Cycles: 4 hrs at -20°C (-4°F) up to 60°C (140°F), 4 hrs at 60°C (140°F), transitions within 5 minutes, 503.4 Procedure II
Vibration	514.5-5 Procedure I, Annex C, Figure 6, General exposure: 1 hr each axis
Shock	6 cycles each axis, 15 g, 11 ms half sine, 516.5 Procedure I
Loose Cargo (In Shipping Container)	514.5 Procedure II
Transit Drop (Packaged for Shipment)	516.5 Procedure IV, 26 drops
Operating Temperature Range	0°C to 55°C (32 to 131°F)
Storage Temperature Range	-20°C to 60°C (-4 to 140 °F) with battery, 24 hrs
Dust Proof/Dripping Water Proof	As per IEC 529 specification for IP67 classification
Compliance	EMC/EMI EN 55011 EN61000-6-2:2001 Ultrasound EN 12668 ASTM E1324 E317 ANSI/NCSL Z 540-1-1994 MIL STD 45662A MIL STD 2154

Options	
USM Go AWS Option	AWS sizing tool according to AWS D1.1 Structural welding code
USM Go Dac Option	Dac sizing tool 16 points Compliant with TCG: 110 dB dynamic TCG: 120 dB/μs slope EN 1712- EN 1713 - EN 1714 ASME & ASME III JIS Z3060 compliant
USM Go DGS Option	DGS sizing tool compliant with EN 1712
USM Go Embedded Datalogger Option	Custom linear and grid file creation
USM Go Squarewave Pulser Option	Allows pulser parameters fine tuning Voltage adjustment from 120 V to 300V per 10 V steps Pulse width adjustment from 30 ns to 500 ns per 10ns steps
USM Go Manual PRF and Phantom Option	Allows Manual PRF optimization between 15 Hz and 2000 Hz per step of 5 Hz. Phantom PRF will help to identify ghost echo due to multiple reflections in low materials



www.gesensinginspection.com

GEIT-20056EN(08/09)

© 2009 General Electric Company. All Rights Reserved. Specifications are subject to change without notice. GE is a registered trademark of General Electric Company. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE. CR/Flex is a trademark of GE Sensing & Inspection Technologies



Your Complete Source for
Testing Equipment Since 1969!

www.BergEng.com
Berg Engineering & Sales Company, Inc.

1-847-577-3980
Info@BergEng.com