



Mi-Glow® 800

Physical Characteristics

Forest green powder, odorless.

Particle Certification


Particles meet or exceed all relevant industry specifications, including but not limited to ASTM E 1444, AMS 3044, MIL-STD-271, NAVSEA 250-1500-1 and NTR-1E. Certification is included with each shipment.

Particle Color

Fluorescent Yellow-Green

Average Particle Size

3 μm

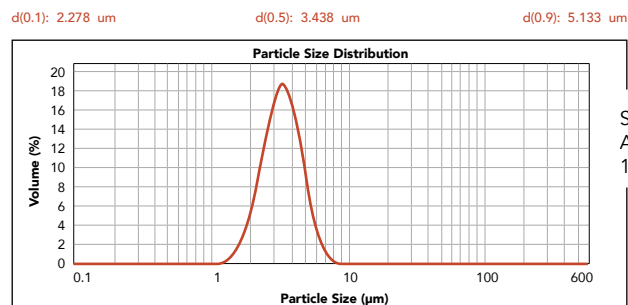

Specific Surface Area:
1.84 m^2/g

AMS Standard

3044

SAE Sensitivity*

8

[*Representative of the number of lines shown on a tool steel ring as defined in SAE AS5282.]

Temperature Range

32-120°F (0-49°C)

Related Product Information:

Safety Data Sheet
Technical Bulletin 240

Item

FG-3100
FG-3102

Package Size

1 pound/jar
12 pounds/pail

Mi-Glow® 800 is fluorescent yellow-green particles used with CircleSol M™, a refined petroleum distillate. It is designed to be used with UV-A light to detect fine discontinuities, such as those associated with the steel rolling, forming, machining, welding and heat treatment processes. The sizing of the Mi-Glow® 800 particle typically ranges from 1 to 5 μm , with an average of 3 μm . It meets or exceeds AMS 3044 and all applicable industry specifications. Mi-Glow® 800 particles improve accuracy and visual clarity in presenting critical discontinuities to the human eye.