

TRAMEX

Moisture Meters for Wood

Compact



The **Compact** is a hand-held instrument designed to instantly and accurately measure moisture content in wood and give an indication of the moisture condition of other materials such as wood by-products, plaster and brick. Using built-in electronic probes or optional interchangeable electrodes, the **Compact** measures moisture content which is then indicated on a clearly calibrated analog dial. The **Compact** provides a moisture content range of 5-30 % in wood. This pocket-size and versatile instrument offers an accurate, fast and convenient method of moisture measurement.

Professional




The **Professional** is a hand-held instrument designed to take precise measurements of moisture content in wood and wood products. Using built-in electronic probes or optional interchangeable electrodes, the **Professional** is easy to use and extremely accurate, giving readings up to 40% in 0.1% increments over the entire measurement range. Readings are displayed on the large clear view digital LCD display. The **Professional** offers a most practical and accurate way of ensuring that wood is at the correct moisture level for its intended use, proving it to be a vital tool for good quality control.

These portable, battery-operated meters combine a sophisticated electronic design with a durable, lightweight aluminium housing.

A choice of interchangeable electrodes and pins make the **Compact** and **Professional** flexible enough for virtually any application. The selection of electrodes includes: deep hammer type, shallow penetration and deep wall type.

The Compact and Professional are easy-to-use and advanced in design

Features

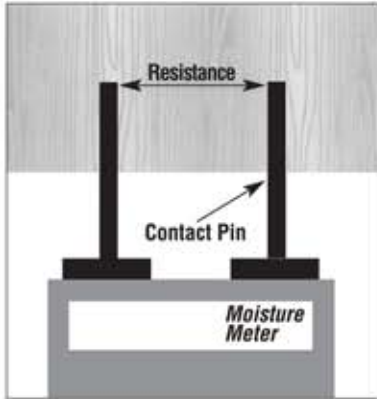

The Compact and Professional are able to provide fast, accurate moisture readings by using advanced technology based on electrical resistance. When the hand-held or hammer probes are pressed into wood, the electrical resistance between the probes is measured and indicated on the large, easy-to-read display meter. If moisture is present in the wood, the electrical resistance between the probes changes. The higher the moisture content, the greater the reduction in resistance. This resistance is sensed by the instrument which then translates it into the percentage of dry weight moisture content.

The importance of determining moisture content

The three main reasons for controlling moisture content in wood are:

- To minimise problems due to dimensional change or distortion which can be caused by moisture loss or gain by the wood or wood byproducts when in use.
- To enable efficient processing such as milling, machining, gluing, laminating, spraying and painting.
- To prevent deterioration and decay, ensuring adequate strength.

Specifications

Compact

Size: 6 1/4" x 3" x 1"

(160mm x 75mm x 25mm)

Net weight: 8.8 ounces (250 grams)

Battery: one standard 9v battery (included)

Range: up to 40% wood moisture content

Display: Analog Meter

Professional

Size: 6 1/4" x 3" x 1"

(160mm x 75mm x 25mm)

Net weight: 8.8 ounces (250 grams)

Battery: one standard 9v battery (included)

Range: up to 40% wood moisture content

Display: LCD with a resolution of 0.10% over entire range



A complete selection of electrodes and accessories are available. All are interchangeable between the Compact and Professional. All Tramex Moisture Meters include a one-year manufacturer's warranty.

Tramex also manufactures:

Non-destructive Moisture Meters

- For Hardwood Flooring
- For Concrete Flooring
- For Building Inspection
- For Roofing
- For Wood
- For EIF Cladding Systems

- Immediate accurate readings on a clear easy-to-read analog display or LCD
- Wide moisture content range
- Built-in pins
- Built-in socket for use with a choice of external electrodes
- Reading Hold facility (PTM)
- Temperature stable circuit
- Pocket-sized, easy-to-use
- Heavy-duty yet light-weight aluminium construction.
- Power source - standard 9v battery (included)
- Range of accessories available



Optional Pins

Code	Length	Type of Pin	Max Penetration
SPI-200	200mm (8")	Straight insulated	175mm (7.0")
SPI-90	90mm (3.5")	Straight insulated	72mm (2.8")
SPI-52	52mm (2")	Straight insulated	36mm (1.5")
TP-30	30mm (1.2")	Tapered	14mm (0.5")
TP-20	20mm (0.7")	Tapered	7.5mm (0.3")

